



Removing the Cup from the Talpa FSR 1330's Tool Holder

To push HutlinerPackers® or to install specific tools, it may be necessary to remove the cup from the tool holder.

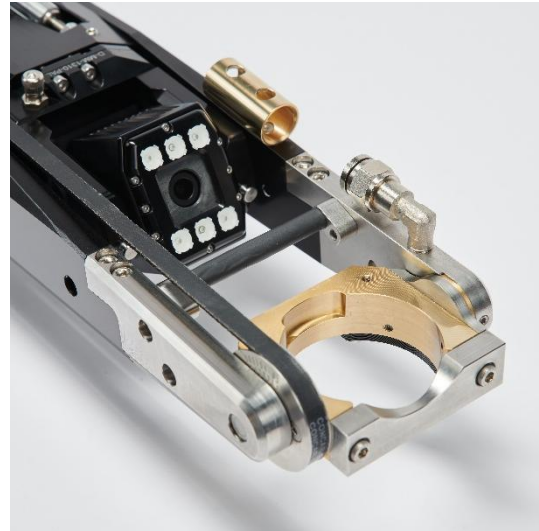


Remove the Cup

- Rotate the tool holder until the cup's screws are easily accessible. Loosen and remove the four screws of the cup. Make sure the *O-Ring* (000807-00 O-Ring 5 x 1) remains on the cup.

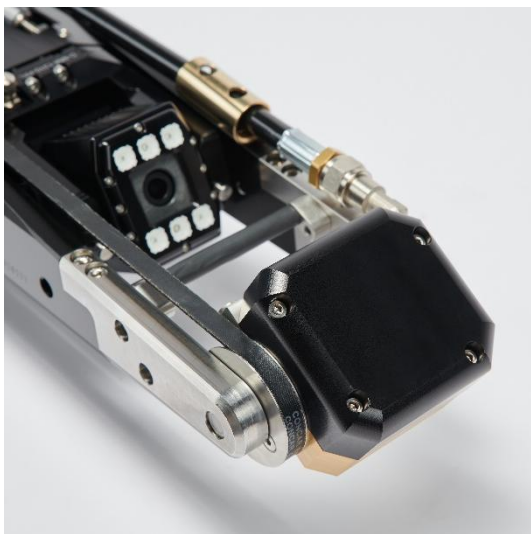

Install the Cover

- To protect the air lines from dust and debris, the hole in the tool holder must be sealed with the provided cover (000808-01 Verschlusskappe). Simply screw the cover onto the tool holder as shown.
- The tool holder can now be rotated back to its working position.

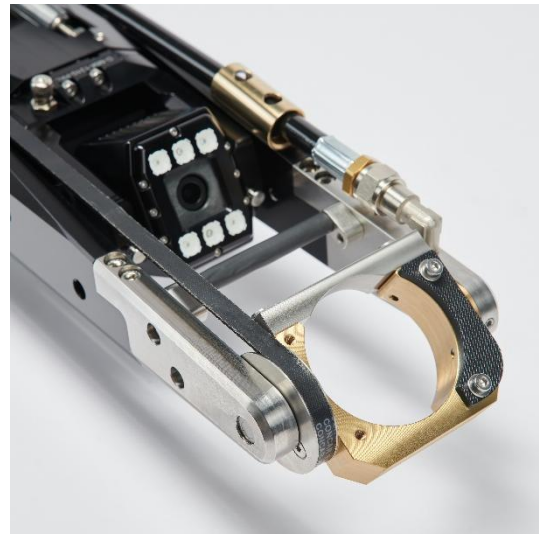

Remove the Air Hose

- Unscrew the air hose from the adapter, mounted in the 90° elbow and close it with the included plug (Z00413-00 Verschlusschraube G 1/4).

